



PAINT PROTECTION FILM


GRAYBOX PPF

CoreTech GrayBox Paint Protection Film is engineered to deliver reliable, cost-effective protection by repelling mud, grime, and chemical contaminants to help prevent surface staining, while offering excellent color stability and an installer-friendly adhesive system that allows for easy reworking and repositioning during application.

PHYSICAL PROPERTIES	TEST METHOD	NOMINAL VALUE
Total Thickness	Micrometer	7.4mils [185µm]
Release Liner Thickness	Micrometer	3.0mils [75µm]
TPU Thickness	Micrometer	6.0mils [150µm]
Elongation at Break	ASTM D882	> 300%
Elongation to Crack	ASTM D882	> 80%
Tensile Strength at Break	ASTM D882	3,300 lbs/in ²
Gloss	ASTM D523, 60° angle	> 90 GU

PERFORMANCE DATA	TEST METHOD	NOMINAL VALUE
Initial Peel (20mins, 72F)	ASTM D3330 Test Method A	1,300 g/in
Heat Aged Peel (30mins, 248F)	ASTM D3330 Test Method A	2,900 g/in
Stain Resistance	Sharpie Test, dry Wipe	< 1.20 ΔL*
Stain Resistance	Sharpie Test, IPA Wipe	< 0.40 ΔL*
Hydrophobicity	ASTM D5946, H2O contact angle	> 93°
Chemical Resistance, Gasoline		Not Affected
Chemical Resistance, Soap & water	30 min submersion, visual inspection after 24 hrs.	Not Affected
Chemical Resistance, Hydrochloric Acid		Not Affected
Color Stability, Δb* 2000 hours	ASTM G154, Cycle 6	< 1.00 Δb*
Damp Heat Aging, 85:85	750 Hours 85°C and 85% RH	< 0.85 Δb*
Abrasion Resistance	Taber 25	< 2.0 ΔL*
Abrasion Resistance	Taber 100	< 2.7 ΔL*
Impact/Chip Resistance	SAE J400 (Gravelometer)	No ruptures
Self-Healing, Active	Brass brush, 15sec int.	Requires Heat
Self-Healing, with Heat	1kg weight, hot water	Heals moderate scratches

PERFORMANCE MAP

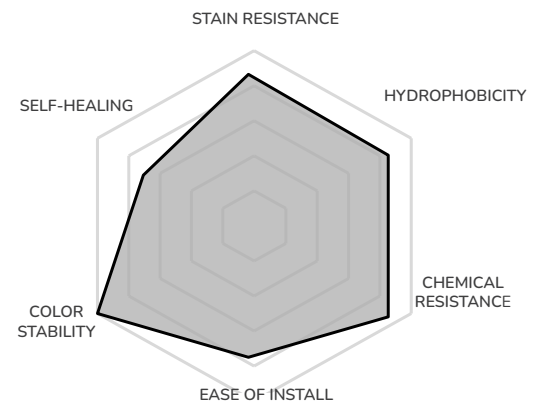

CONTACT CORETECH PERFORMANCE FILM SOLUTIONS

Americas
Saint-Gobain Performance Film Solutions
4520 Viewridge Avenue
San Diego, CA 92123

WWW.CORETECHFILMS.COM



IMPORTANT: The values presented are typical values and should not be used for specification purposes. Contact your representative for more information. It is the user's responsibility to ensure the suitability and safety of CoreTech products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. CoreTech assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated by purchaser and/or user.

WARRANTY: We warranty specifications at delivery and honor claims for such breach of warranty for six (6) months after delivery. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential arising out of the use, misuse or inability to use this product(s). CORETECH DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

© Copyright 2026 Saint-Gobain Performance Films Corporation and/or its affiliates | CoreTech is a service mark of Saint-Gobain.

Valid 02/2026 • Supersedes all previous versions

*Pictures shown are for illustration purpose only.